

BBF/FSK

BALL VALVE WITH FLANGES, SHORT PATTERN, FULLY WELDED

DN 250-400 | PN 10-40

FULL BORE

MATERIALS

MATERIALS	PN	DN	Type 1	Type 2
Body	10-40	250-400	Steel	Steel
Ball	10-40	250-400	Ductile iron, hard chromed	Ductile iron, hard chromed
Sealings	10-40	250-400	PTFE	PTFE
O-Rings	10-40	250-400	NBR	FPM

Please state Order-No. and Type:
FSK V XXX.XXX / Type (1 o. 2)

INFORMATION

Ball Valve with flanges

/// Length face-to-face DIN EN 558 FTF 28

/// Flange dimensions DIN 2501 Blatt 1

/// TÜV-type approval

/// Scope of delivery without switch handle; on request with worm gear, pneumatic or electrical or electric drive available.


OPTIONS

/// DIN-DVGW-Approval for Gas

/// Also available for district heating

/// Other shapes of flange sealing surfaces on request

/// Special designs on request

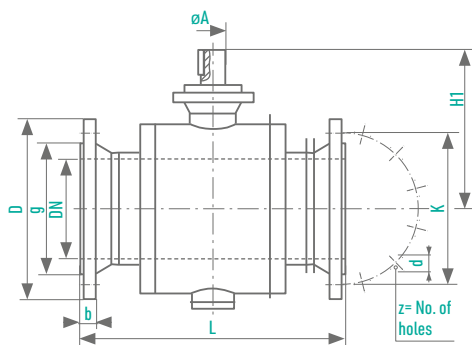

	DN	PN	L	D	g	K	b	z	d	HT	aA	Wght	Order Number
PN 10 Raised face	250	10	650	395	320	350	26	12	22	385	60	187	FSKV 010.250
	300	10	750	445	370	400	26	12	22	427	60	342	FSKV 010.300
	400	10	950	565	482	515	26	16	26	515	80	735	FSKV 010.400
PN 16 Raised face	250	16	650	405	320	355	26	12	26	385	60	189	FSKV 016.250
	300	16	750	460	378	410	28	12	26	427	60	351	FSKV 016.300
	400	16	950	580	490	525	32	16	30	515	80	756	FSKV 016.400
PN 25 Raised face	250	25	650	425	335	370	32	12	30	385	60	206	FSKV 025.250
	300	25	750	485	395	430	34	16	30	427	60	370	FSKV 025.300
	400	25	950	620	505	550	40	16	36	515	80	800	FSKV 025.400
PN 40 Raised face	250	40	650	450	345	385	38	12	33	385	60	227	FSKV 040.250
	300	40	750	515	410	450	42	16	33	427	60	407	FSKV 040.300
	400	40	950	660	535	585	50	16	39	515	80	870	FSKV 040.400